


Multi-Layer Hi-Resolution Mixer Matrix Scaler Seamless Switcher with 4 Scalers dedicated to High-End AV presentations



Inputs

Outputs

Special Features

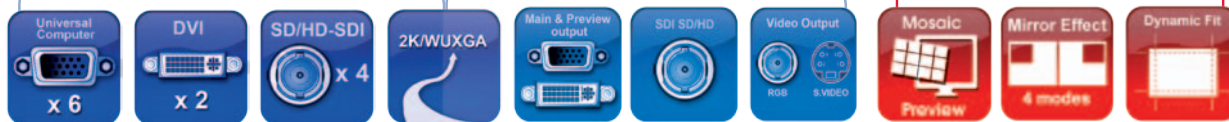

Features



Eikos LE at a glance

- > High Resolution Mixer and Matrix (12x2) Seamless Switcher
- > Mosaic Preview, Dynamic Fit and Mirror Effect
- > Full High Resolution digital processing
- > Ideal for your High-End AV presentations
- > Numerous Effects

Key Features

12 Inputs

- 2 DVI Inputs
- 6 Universal Analog Inputs
- 4 x 3G/HD/SD-SDI
- SDTV, EDTV, HDTV and Computer formats up to 2K
- Full digital In/Out Processing

Outputs

- 2 Analog and Digital Outputs: Main & Preview
- Computer Formats up to 2K
- RGBHV and DVI
- Video Output: SD/HD-TV Analog and 3G/HD/SD-SDI

Operation Modes & Effects

- 2 Operation Modes: Mixer and Native Matrix
 - Mixer Mode: Effects between each layer
 - Matrix Mode: 1 PIP on frame in Mirror Mode
- Logo & Frame Store (2 Logos + 1 frame simultaneously on display)
- Chroma/Luma Key/DSK Title

(...)

Reference

- > EKS400: Eikos LE

To Control EKS400


- > Remote Control Software (RCS): EKS400 (Supplied)
- > ARC200: Axion2
- > ORC50: Orchestra
- > TRK-800: Triple Remote Keypad TRK-800
- > RK-300: Remote Keypad RK-300



Key Features

- DSK on Analog & Digital Inputs
- PIP: Pan & Zoom resizing up to 1000%
- PIP Open/Close Animation
- Dynamic PIP (Basic)
- PIP Border (Edge: 1 Color, 1 Width, 1 Height)
- 2 PIPs on Live Background in Mixer Mode
- 3 PIPs on Frame Background in Mixer Mode
- Dynamic Fit: Automatic adjustment of the image to fit the PIP borders
- Transitions: Fade (Dissolve), Cut, Wipe, Slide
- Animated Logo
- Mosaic Preview
- Smooth Move effect
- 8 Memory Presets
- Internal Test Patterns
- Audio Breakaway
- Audio Delay Compensation
- 12 Preset Layouts

Diagram

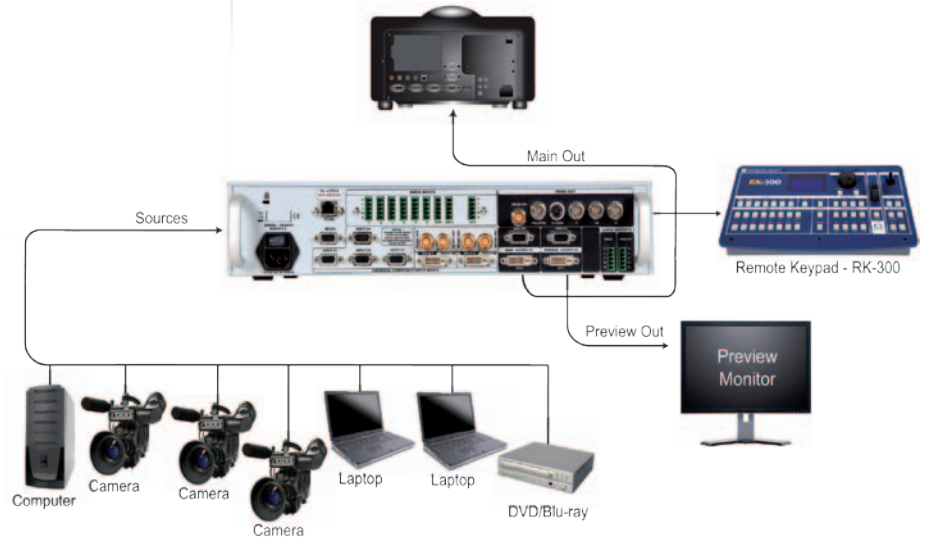

Technical Specifications

6 Universal Inputs - Analog Inputs (All inputs #1 to #6)

- SD-TV:**
- Composite, S.Video, YUV, RGsB or RGBS
 - NTSC: 15.735kHz/60Hz
 - PAL/SECAM: 15.625kHz/50Hz
- ED/HD-TV:**
- RGsB, RGBS or YUV
 - 480p/60 Hz – 576p/50 Hz - 720p, 1080i, 1035i /50 or 60Hz – 1080p/24, 25, 30, 50 or 60 Hz - 1080psF/24, 25 or 30 Hz
- Computer:**
- RGBHV, RGBS or RGsB
 - Resolution up to 1600x1200/60 Hz, 1920x1200/60 Hz or 2048x1080/60 Hz
 - Horizontal frequency from 31.5 to 130 kHz
 - Vertical frequency up to 130 Hz
 - FpxMax = 165MHz

6 Digital Inputs (DVI-I 1, DVI-I 2, SDI1 to SDI4)

- DVI-I: SD-TV, ED-TV, HD-TV and Computer formats
- SDI: SD-TV & HD-TV – YUV/10bits/4:2:2 or 3G-SDI
- Automatic synchronization detection

Main and Preview Outputs

- Computer Digital and Analog:**
- RGBHV, RGBS or RGsB and DVI
 - Resolution up to 1600x1200/60 Hz, 1920x1200/60 Hz or 2048x1080/60 Hz
 - Vertical frequency 50, 60, 72 or 75 Hz depending on Output format
 - FpxMax = 165MHz
- HD-TV:**
- RGsB, RGBS or YUV, DVI
 - 720p, 1080i, 1035i/50 or 60Hz - 1080p/24, 25, 30, 50 or 60Hz - 1080psF/24, 25 or 30Hz

Operation Standards

- SMPTE 259M, SMPTE 274M, SMPTE 292M, SMPTE 296M and SMPTE 424M

Video Outputs

- Analog and Digital SD/HD-TV
- SD-TV: NTSC/PAL, S.Video, RGB/YUV and SDI
- HD-TV: RGB/YUV and HD-SDI, or 3G-SDI
- HD Formats: 720p@50/59.95 & 60Hz - 1035i @59.94@60Hz

- 1080i@50/59.94@60Hz - 1080p@ 23.97/24/25/29.97/30/50 & 60Hz - 1080psF@25 or 30Hz

Audio Stereo In/Out

- **Input:**
 - 8 Audio stereo inputs + 1 Auxiliary (all Balanced/Unbalanced)
 - Vi = +15dBu max
 - Zi = 20 kOhms (Unbalanced)/40 kOhms (Balanced)
 - Adjustable Level per input
 - 4 inputs from Embedded SDI
- **Output:**
 - 2 independent outputs
 - Balanced/Unbalanced
 - Vo = +15 dBu/300 Ohms (Unbalanced)
 - Vo = +21 dBu/600 Ohms (Balanced)

User Controls - Front Panel

- Standby On/Off
- Input, Layer and Logo direct access
- Freeze/Black
- Effect and preset selection
- Large Graphic VFD screen with control knobs and buttons for easy and fast access to menus and adjustments

Connectors - Rear Panel

- Input #1 to #4 Connectors:
 - HD15-F: (Analog SD/ED/HD-TV and Computer)
- Input #5 to #6 and DVI-I 1 to DVI-I 2 Connectors:
 - DVI-I Female: (Analog SD/ED/HD-TV and Computer)
- SDI 1, SDI 2, SDI 3, SDI 4 = BNC: SD/HD SDI
- Audio:
 - 5 pin MCO connectors: 9 for Inputs and 2 for Outputs
- DB9: Dual RS232 for remote control
- RJ45: Ethernet connection
- AC main connector with On/Off switch

Main and Preview Output Connectors

- Each output is fitted with:
- DVI-I Female: (Digital and Analog) RGB or YUV
 - HD15 Female: RGB or YUV

Video Out

- BNC-F: SD/HD-SDI (With audio embedded)
- 3 x BNC-F: Y-Cb-Cr
- Mini Din 4: S.Video
- BNC-F: Composite Video PAL/NTSC

Dimensions

- 2U, 19"
- D 13" x W 19" x H 3.15"
- D 330 mm x W 480 mm x H 88 mm

Weight

- 5.3kg/11.68lbs

Power Supply

- Internal, universal, automatic, 100-240 V; 50/60 Hz; 140 W (UL, CSA, GS, CE)

Supplied with

- 1 x Power supply cord
- 2 x DVI-I Male to HD15 Female + DVI-D Female breakout cable
- 1 x HD15 to 5 BNC cable
- 1 x Ethernet crossover cable
- 1 x Set of 11 audio 5 pin screw terminals
- 1 x Remote Control Software (RCS) (PC only)*
- 1 x User Manual*
- 1 x Quick Start Guide*

Warranty

- 3-year warranty on parts and labor back to factory

Specifications subject to change without prior notice



* All RCS, User Manuals and Quick Start Guides are also available on www.analogway.com